


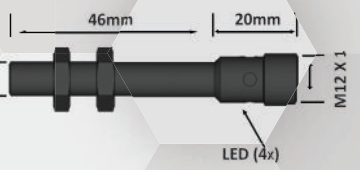






8mm

Threaded Barrel Proximity Sensor with connector

Range (mm)	24vdc Circuit	Mounting and Characteristics	Part number	Sensor Image	Compatible Cordsets
2	PNP + IO-Link normally open	Embeddable	DW-AS-623-M8-001		7000-08041-0140200 2m straight 7000-08041-0140500 5m straight 7000-08041-0141000 10m straight
4	PNP + IO-Link Normally Open	Non-Embeddable	DW-AS-633-M8-001		7000-88001-0140200 2m M to F 7000-88001-0140500 5m M to F 7000-88001-0141000 10m M to F
2	NPN Normally open	Embeddable	DW-AS-621-M8-001		7000-41211-0000000 2x M8 female to 1x M12 male for use with port blocks use in conjunction with M to F cables
3	PNP + IO-Link Normally Open	Full stainless body with ActivStone Anti Weld-Spatter coating, Embeddable	DW-AS-703-M8-697		Consult for appropriate weld protection connectivity. Sensor uses M12 connector.

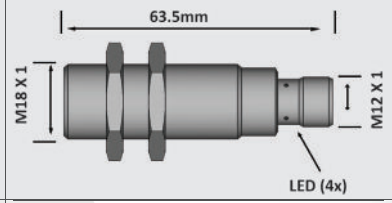
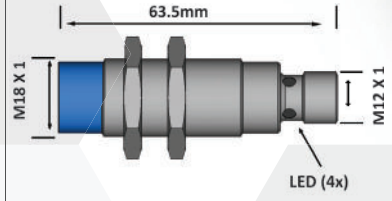
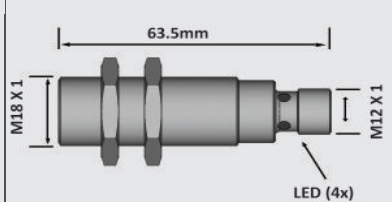
12mm

Threaded Barrel Proximity Sensor with connector

Range (mm)	24vdc Circuit	Mounting and Characteristics	Part number	Sensor Image	Compatible Cordsets
4	PNP + IO-Link normally open	Embeddable	DW-AS-623-M12		7000-12221-0140200 2m straight 7000-12221-0140500 5m straight 7000-12221-0141000 10m straight
8	PNP + IO-Link Normally Open	Non-Embeddable	DW-AS-633-M12		7000-12341-0140200 2m straight 7000-12341-0140500 5m straight 7000-12341-0141000 10m straight
4	NPN Normally open	Embeddable	DW-AS-621-M12		7000-40021-0140200 2m M to F 7000-40021-0140500 5m M to F
6	PNP + IO-Link Normally Open	Full stainless body with ActivStone Anti Weld-Spatter coating, Embeddable	DW-AS-703-M12-693		7000-41131-0000000 2x M12 female to 1x M12 male for use with port blocks use in conjunction with M to F cables

18mm

Threaded Barrel Proximity Sensor with connector




Range (mm)	24vdc Circuit	Mounting and Characteristics	Part number	Sensor Image	Compatible Cordsets
8	PNP + IO-Link normally open	Embeddable	DW-AS-623-M18-002		7000-12221-0140200 2m straight 7000-12221-0140500 5m straight 7000-12221-0141000 10m straight
12	PNP + IO-Link Normally Open	Non-Embeddable	DW-AS-633-M18-002		7000-12341-0140200 2m straight 7000-12341-0140500 5m straight 7000-12341-0141000 10m straight
10	PNP + IO-Link Normally Open	Fully stainless steel body and face Embeddable	DW-AS-703-M18-002		7000-40021-0140200 2m M to F 7000-40021-0140500 5m M to F

Inductive Proximity Sensors, Normally Open three-wire sensors, PNP sensors equipped with IO-Link, Manufactured by



30mm

Threaded Barrel Proximity Sensor with connector


Range (mm)	24vdc Circuit	Mounting and Characteristics	Part number	Sensor Image	Compatible Cordsets
10	PNP + IO-Link normally open	Embeddable	DW-AS-603-M30-120		7000-12221-0140200 2m straight 7000-12221-0140500 5m straight 7000-12221-0141000 10m straight
25	PNP + IO-Link Normally Open	Non-Embeddable	DW-AS-633-M30-002		7000-12341-0140200 2m straight 7000-12341-0140500 5m straight 7000-12341-0141000 10m straight
20	PNP + IO-Link Normally Open	Fully stainless steel body and face Embeddable	DW-AS-703-M30-002		7000-40021-0140200 2m M to F 7000-40021-0140500 5m M to F

Western Ohio:
419-893-0283

Southern Ohio:
937-519-1019

Eastern Ohio:
440-546-1019

www.lydey.com



Products shown are stocked in our Cleveland warehouse for Next Day UPS Ground delivery.